


PIN CONFIGURATIONS

The PIN arrangement of BW3010T is shown in Figure 1.

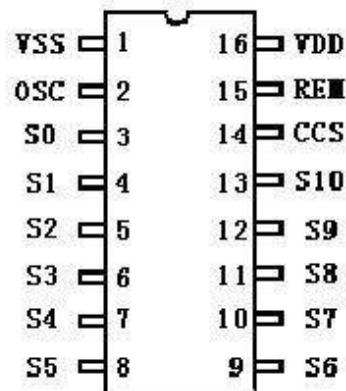

In Figure 1, PIN REM can be used as output terminal which sends out the remote control code; PIN S0 to S10 are I/O terminals for key-board scanning; PIN CCS is input terminal for user_code select through connect with S0-S10. PIN osc are used for crystal oscillator.